



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 7/50</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/44745</b>
			(43) International Publication Date: <b>8 October 1998 (08.10.98)</b>
(21) International Application Number: <b>PCT/JP98/01432</b>		(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>30 March 1998 (30.03.98)</b>		<b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: <b>08/825,509                      31 March 1997 (31.03.97)                      US</b>			
(71) Applicant: <b>SHARP KABUSHIKI KAISHA [JP/JP]; 22-22, Nagaïke-cho, Abeno-ku, Osaka-shi, Osaka 545-0013 (JP).</b>			
(72) Inventors: <b>HALLBERG, Bryan, Severt; 7519 N.E. 152nd Court, Vancouver, WA 98682 (US). LEI, Shaw-min; 4522 N.W. Valley Street, Camas, WA 98607 (US). MESSING, Dean, Savage; 27424 S.E. 15th Street, Camas, WA 98607 (US). SAMPSELL, Jeffrey, Brian; 27119 N.E. Bradford Road, Vancouver, WA 98682 (US). SEZAN, Muhammed, Ibrahim; 2213 N.W. Hood Drive, Camas, WA 98607 (US). WESTERMAN, Larry, Alan; 3707 N.W. Thurman Street, Portland, OR 97210-1234 (US).</b>			
(74) Agents: <b>MITANI, Hiroshi et al.; 9th floor, Salute Building, 72, Yoshida-cho, Naka-ku, Yokohama-shi, Kanagawa 231-0041 (JP).</b>			

**RECEIVED**  
**MAY 07 2001**  
**Technology Center 2600**

(54) Title: **APPARATUS AND METHOD FOR SIMULTANEOUS VIDEO DECOMPRESSION**

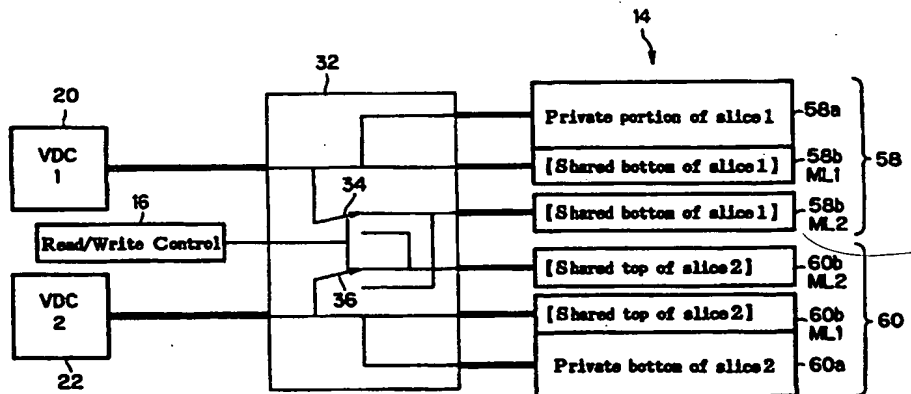

(57) Abstract

The apparatus is intended to simultaneously decompress separated portions of a compressed video image. The apparatus includes an input mechanism (12) for receiving a compressed video image. A video decoder mechanism (18) is provided for decompressing, asynchronously, the compressed video image. The image is partitioned into discrete slices, each slice is decoded by a discrete segment of the video decoder mechanism. A selected, or boundary, portion of each slice may be decoded by more than one segment of the video decoder mechanism. A signal director (32) is provided for directing the decoded video image to plural video image buffers (46), each having plural memory locations therein, which are provided for storing a single video image. A video output mechanism (54) is provided for transmitting a decompressed video image. The method includes partitioning the video image into discrete slices; designating a portion of each slice to be a shared portion and designating the remainder of each slice to be an exclusive portion; defining a buffer having multiple memory locations therein; storing the image in the buffer, which includes storing the exclusive portion of each slice in a single memory location and storing the shared portion of the image in at least two memory locations; decoding, asynchronously, each slice with a discrete video decoder, wherein a video decoder reads only the exclusive portion of its assigned slice and reads both the shared portion of its assigned slice and the shared portion of an adjacent slice to form a decoded slice; synchronizing the decoded slices; and writing the decoded image to a video output mechanism.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DESCRIPTION

### APPARATUS AND METHOD FOR SIMULTANEOUS VIDEO DECOMPRESSION

#### Field of the Invention

This invention relates to high resolution digital television, and specifically to an  
5 apparatus and method for decompressing a digital video signal.

#### Background of the Invention

A significant advantage of digital television is that the signal comprising the video  
and audio information may be compressed, by any number of data compression techniques.  
This allows for higher speed transmission of the signal and allows more information to be  
10 contained within a specific signal. The signal, however, must be decompressed so that the image  
may be displayed on a television screen and the audio portion may be played through a speaker.  
The compression and decompression of audio and video signals is a computer intensive  
operation, requiring a great deal of information to be read, decompressed and assembled into the  
video and audio components of the digital television signal.

15           Of particular interest is the decompression of signals generated under the Motion  
Picture Experts Group (MPEG) standards, or any other decompression or image processing  
system wherein the system reaches both upwards and downwards to sequentially arranged  
images. One way to decompress such a signal is to partition the signal into "slices", store the  
slices in memory, and provide multiple decoder mechanism, such as decoder chips, which work  
20 in an asynchronous, parallel manner to decode their particular slice. In the case where the portion  
of the image near the slice boundary is being decoded, more than one chip will require access to  
the memory location for that slice portion, in order to avoid artifacts along the line that is being

decoded.

Known memory access bus management hardware and software, if given the  
aforementioned task, will operate only as fast as the slowest decoding chip in the system, causing  
the other decoder chips to pause, or wait, until memory access by the slowest decoder chip has  
5 been completed. Additionally, the use of a shared bus by plural chips limits the rate of data flow.  
This obviously causes delays in the decoding process and limits the amount of information which  
may be decoded for a given time period. U.S. Patent Nos. 5,428,403, 5,473,379 and 5,475,430  
disclose techniques wherein a video frame is divided into multiple blocks for compression and  
transmission, and which use motion vectors to decompress and align the multiple blocks into a  
10 final image.

#### Summary of the Invention

The apparatus of the invention is intended to simultaneously decompress  
separated portions of a compressed video image. The apparatus includes an input mechanism for  
receiving a compressed video image. Additionally, a no-wait video decoder mechanism is  
15 provided for decompressing, asynchronously, the compressed video image. The image is  
partitioned into discrete slices, each slice is decoded by a discrete segment of the video decoder  
mechanism. A selected, or boundary, portion of each slice may be decoded by more than one  
segment of the video decoder mechanism. A signal director is provided for directing the decoded  
video image to plural video image buffers, each having plural memory locations therein, which  
20 are provided for storing a single video image. One video image buffer stores a current frame,  
another video image buffer stores a previous I or P video frame, and yet another buffer stores a

future I or P video frame. In the case where a selected portion of each slice is manipulated, the selected portion of the slice is stored in more than one memory location. The remaining portion of each slice (the non-selected portion) is stored in only one memory location. A video output mechanism is provided for transmitting a decompressed video image.

5                   The simultaneous video decompression apparatus of the invention uses a conventional single-port memory module as buffer mechanism which, in conjunction with a signal director, to accommodate the memory access requirements that allow the decoder chips to function in a no-wait manner, i.e., there is no need for one chip to wait for the other chip to access memory.

10                   The method of the invention includes partitioning the video image into discrete slices; designating a portion of each slice to be a shared portion and designating the remainder of each slice to be an exclusive portion; defining a buffer having multiple memory locations therein; storing the image in the buffer, which includes storing the exclusive portion of each slice in a single memory location and storing the shared portion of the image in at least two memory  
15                   locations; decoding, asynchronously, each slice with a discrete video decoder, wherein a video decoder reads only the exclusive portion of its assigned slice, and reads both the shared portion of its assigned slice and the shared portion of an adjacent slice to form a decoded slice; synchronizing the decoded slices; and writing the decoded image to a video output mechanism.

20                   These and other objects and advantages will be more fully appreciated as the description which follows is read in conjunction with the drawings.

### Brief Descriptions of the Drawings

Fig. 1 is a block diagram showing the apparatus and method of the invention.

Fig. 2 depicts a single video image divided into slices.

Fig. 3 depicts a video image as the image is written.

5 Fig. 4 depicts a video image as the image is read.

Fig. 5 depicts a signal director in a write mode.

Fig. 6 depicts a signal director in a read mode.

### Detailed Description of the Preferred Embodiment

Referring now to Fig. 1, the apparatus of the invention is depicted generally at 10.

10 Apparatus 10, also referred to herein as a decompression apparatus, includes an input mechanism 12 which receives a compressed video input image 14. Compressed video input 14 is transmitted to a video system control, also referred to herein as a read/write control, 16, and to a video decoder mechanism, depicted generally at 18. As will be explained later herein, input mechanism 12 and system controller 16 are operable to divide video image 14 into slices. Although the thrust  
15 of this description deals with decoding video data, it will be appreciated by those of skill in the art that audio data must also be decompressed and manipulated. The term "signal data" is used herein to refer to the combined video and audio data. Decoder mechanism 18, in the preferred embodiment, includes plural video decoder chips, such as chip 1, shown at 20, chip 2 shown at 22, and chip N shown at 24. Each decoder chip represents a discrete segment of video decoder  
20 mechanism 18, and is operable to decode a slice of image 14.

Signal data to and from video decoder mechanism 18 is directed over dedicated

channels 26, 28 and 30 from and to a signal director 32, respectively, which includes switches 34, 36 and 38. Channels 26, 28 and 30, referred to herein as Channel 1, Channel 2 and Channel N, respectively, allow a decoded image slice to be transmitted from a given decoder chip to and through signal director 32, without regard for the stage of decoding occurring in another decoder chip. Switches 34, 36 and 38, referred to herein as Switch 1, Switch 2 and Switch N, respectively, determine which portion of a video slice is directed over channels 40, 42 and 44, referred to herein as Channel 1', Channel 2' and Channel N', respectively, to a particular location in a buffer mechanism, depicted generally at 46, and also provide access by the decoder chips to the signal data stored in buffer mechanism 46. Again, the use of multiple channels instead of a common bus allows transmission of data without regard for the stage of decoding of related video and audio data in the decoding process.

In the preferred embodiment, buffer mechanism 46 includes three video image buffers (VIBs), designated VIB 1, depicted at 48, VIB 2, depicted at 50, and VIB 3, depicted at 52. Each video image buffer includes plural memory locations. As depicted, and now referring to VIB 1, memory location 1 (ML1) 48a, and memory location 2 (ML2) 48b, are depicted. ML1 and ML2 are present in each VIB. Each VIB stores a single video image. As designated herein, VIB 1 stores a current frame, VIB 2 stores a previous I or P video frame, and VIB 3 stores a future I or P video frame. As will be explained more fully later herein, a selected portion of each slice is stored in more than one memory location, i.e., the selected portion will be stored in ML1 and ML2 of each video image buffer. The remaining, or non-selected portion, of each slice is stored in only ML1.

Once the image has been properly decompressed, it is transmitted from buffer mechanism 46 to a video output mechanism, or display device, 54 which displays the video output 56. As previously noted, the video decompression apparatus of the system utilizes plural individual decoders, which work in parallel and reconstruct individual portions of the resulting video output image 56.

In the description which follows, the apparatus will be described as having only two video decoder chips, i.e., chip 1 and chip 2. Each chip decodes part of compressed video image 14, which is partitioned into as many "slices" as there are decoder chips. It should be appreciated by those of skill in the art that more than two chips may be used in practicing the method of the invention and in building the apparatus thereof, which would simply involve the division of the video image into more than two slices.

Referring now to Fig. 2, one possible technique for accomplishing an object of the invention is to divide a video image 14 into a top slice 62 and a bottom slice 64. This is accomplished by system controller 16 and input mechanism 12 and is not dependent on the compressed video input image 14.

Referring now to Fig. 3, a reconstructed image includes four areas: the top of slice 1 (58a), also referred to herein as a remaining portion, is written and read only by video decoder chip 1. The bottom portion of slice 1, 58b, also referred to herein as a shared or boundary portion, will be written exclusively by chip 1, but is made available for reading by chips 1 and 2. In this case, the shared bottom of slice 1, 60b, is stored in both ML1 and in ML2. Likewise, the bottom of slice 2 is written and read exclusively by video decoder chip 2. The top portion of slice



2 is written by chip 2, but is read by chips 1 and 2 and is stored in both ML1 (48a, 50a) and ML2 (48b, 50b). Switches 34, 36 are set to write the appropriate slice portions to VDC 1 and VDC 2, prior to decoding, primarily so that the selected, or shared, portions of slice 58 and slice 60 are written into ML1 and ML2.

5                   During decoding, and now referring to Figs. 1 and 5, each decoder chip 20, 22 writes the portion of the image that it reconstructed into non-overlapping segments of ML1, 48a, and ML2, 48b, in VIB 1, which comprises the "current frame." Because the process of image reconstruction requires that motion compensation calculations, as described in the references cited earlier herein, be made, and because such calculations require access to previously stored  
10 image data, VIB 2 is used to store previous I or P video frame information for reference during reconstruction. Specifically, the reconstruction of portions of the image which are along or near the boundary separating the area being reconstructed by chip 1 and chip 2 may require that one or both of the decoder chips have access to a portion of the previous image which is stored in memory locations of VIB 2. Because the decoding process is asynchronous, two adjacent  
15 decoder chips may simultaneously require read access to the same pixels of a previous decoded image.

                  The simultaneous video decompression apparatus of the invention uses a conventional single-port memory module, such as a synchronous DRAM, as buffer mechanism 46 which, in conjunction with signal director 32, and dedicated channels 26, 28, 30, 40, 42 and 44,  
20 accommodates the memory access requirements that allows the decoder chips to function in a no-wait manner, i.e., there is no need for one chip to wait while another chip accesses memory.

Channels 1', 2' and N', 40, 42 and 44, respectively, provide two-way transmission of data signals between signal director 32 and buffer mechanism 46. The data signals are routed in buffer mechanism 46 to/from the appropriate VIB, as required, in a manner that allows for no-wait signal processing.

5                   As previously noted, each video image buffer contains a single video image. In the case of an MPEG compliant decoder, the previously described three video image buffers are required. During the decoding of a single MPEG2 encoded frame, decoder chips 1 and 2 write to VIB 1 to create the current video frame. Each decoder chip may read from one or both of the other video image buffers to retrieve previously-decoded reference pixel values. An individual  
10 video image buffer may be used as the current video frame during one frame interval, and as a reference video frame during the subsequent frame interval. Memory address allocation, direct hardware control or other well-known means may be used to associate a particular video image buffer with either current or reference frame usage, as described in U.S. Patent No. 5,473,379.

                  As will be appreciated by those of skill in the art, the method and apparatus  
15 described herein may also be applied to a video decoder system which is used to decode other motion-compensation based encoding algorithms, including H.261, H.263, and MPEG1. As other video encoding algorithms, such as H.261, require only a single reference image, only two video image buffers may be required in a system designed to decode a compressed H.261 image.

                  Within any video image buffer, each pixel is stored in ML1 or ML2. In the case of  
20 a Pixel which is accessed by a single decoder chip during reconstruction, only one of the memory locations is used. In the case of a pixel which may be accessed by two decoder chips, i.e., those

pixels lying within a certain distance of the boundary between the active areas of the two decoder chips, duplicate copies of the pixel data are stored in both ML1 and ML2 within a video image buffer.

As depicted in Fig. 5, the arrangement of the apparatus during a write operation is depicted. When writing to VIB 1, each decoder chip writes to the memory locations which contain the non-selected and selected portions of its own image slice. When a decoder chip writes a selected portion of the image, memory locations 1 and 2 are both written to. During a read operation, a decoder chip reads from the memory location which holds the video image pixels for its own slice, as well as the memory location which holds the selected portion of the video image written by the other decoder chip. The decompressed image is output as image 56, as depicted in Figs. 1 and 3.

Referring now to Figs. 4 and 6, the arrangement of the apparatus during a read operation is depicted. As previously noted, an image is partitioned into two slices, as in the case of image 14, slices 62 and 64 are formed. The top of slice 1, 62a, is written and read only by video decoder chip 1. The bottom portion of slice 1, 62b, will be written exclusively by chip 1, but is made available for reading by chips 1 and 2. In the read mode, the shared bottom of slice 1, 62b, is stored in both ML1 and in ML2. Likewise, the bottom of slice 2, 64a, is written and read exclusively by video decoder chip 2. The top portion of slice 2 is written by chip 2, but is read by chips 1 and 2 and is stored in both ML1 and ML2 of the appropriate video image buffer. Switches 34, 36 are set to read the appropriate slice portions from VDC 1 and VDC 2, primarily so that the selected, or shared, portions of slice 62 and slice 64 are read from ML1 and ML2.

During a read operation, a decoder chip reads from the memory location which holds the video image pixels for its own slice, as well as the memory location which holds the selected portion of the video image written by the other decoder chip. Fig. 4 depicts the portions of video input image 14 with slices 62 and 64 as arranged for a read mode.

5           A significant advantage of this invention is that any type of read/write memory may be used for the memory locations, including SRAM and DRAM. The arrangement of the memory locations may take any number of forms, however, in the preferred embodiment, the memory locations are arranged in planes, with one byte of Y (luminance) data per pixel and one byte each of Cb and Cr (blue and red color difference) for each four pixels. Signal director 32  
10 includes memory address arbitration programming, in the form of "If...Then" statements, so that the appropriate memory location is accessed for each particular read and write operation. The required size of the shared memory locations is set by the range of the motion vectors processed by video decoding mechanism 18. Additional unused memory locations may be appended at the beginning or end of each image line to pad the memory addresses in order to simplify the  
15 construction of signal director 32.

Assuming that a video decompression system uses motion vectors in the range of +/- 64 pixels, the memory locations for the selected portions of the slice will be 64 lines high by the width of the image. Write access to any of the 64 lines of the memory location will result in the writing of duplicate data into each of the two copies of the memory location. Read access to  
20 any of the corresponding 64 lines will result in the reading of the data from the appropriate memory location.

Thus, an apparatus and method for simultaneous video decompression has been disclosed. Further modifications and variations may be made to the invention without departing from the scope thereof, as defined in the appended claims.

## CLAIMS

1. An apparatus for simultaneous video decompression for use with a video display device, comprising:

an input mechanism for receiving a compressed video image, which compressed video image is partitioned into slices, wherein each slice includes an exclusive portion and a shared portion, and wherein said slices are transmitted as data signals;

a no-wait video decoder mechanism for decompressing, asynchronously, said compressed video image, and wherein discrete segments of said video decoder mechanism decodes a video image slice, and wherein said shared portion of each slice is decoded by more than one discrete segment of said video decoder mechanism;

a signal director for directing said compressed video image to said video decoder mechanisms;

a buffer mechanism having plural video image buffers therein, each video image buffer having plural memory locations, for storing a single video image, wherein one video image buffer stores a current frame, another buffer stores a previous I or P video frame, and another buffer stores a future I or P video frame, wherein said shared portion of each slice is stored in more than one memory location, and wherein said exclusive portion of each slice is stored in only one memory location; and

a video output mechanism for transmitting a decompressed video image.

2. The apparatus of claim 1 wherein said video decoder mechanism includes discrete video decoder segments in the form of "N" video decoder chips.
3. The apparatus of claim 2 wherein said signal director includes "N" switches for directing data signals between said decoder mechanism and said buffer mechanism.
4. The apparatus of claim 1 which further includes dedicated channels between said decoder mechanism and said signal director for transmitting data signals therebetween.
5. The apparatus of claim 1 which further includes dedicated channels extending between said signal decoder and said buffer mechanism for transmitting data signals therebetween.

6. An apparatus for simultaneous video decompression for use with a video display device, comprising:

an input mechanism for receiving a compressed video image, which compressed video image is partitioned into slices, wherein each slice includes an exclusive portion and a shared portion, and wherein said slices are transmitted as data signals;

a no-wait video decoder mechanism, including discrete video decoder segments in the form of "N" video decoder chips, for decompressing, asynchronously, said compressed video image, and wherein discrete segments of said video decoder mechanism decodes a video image slice, and wherein said shared portion of each slice is decoded by more than one discrete segment of said video decoder mechanism;

a signal director for directing said compressed video image to said video decoder mechanisms;

a buffer mechanism having plural video image buffers therein, each video image buffer having plural memory locations, for storing a single video image, wherein one video image buffer stores a current frame, another buffer stores a previous I or P video frame, and another buffer stores a future I or P video frame, wherein said shared portion of each slice is stored in more than one memory location, and wherein said exclusive portion of each slice is stored in only one memory location;

wherein said signal director includes "N" switches for directing data signals between said decoder mechanism and said buffer mechanism; and

a video output mechanism for transmitting a decompressed video image.



7. The apparatus of claim 6 which further includes dedicated channels between said decoder mechanism and said signal director for transmitting data signals therebetween.

8. The apparatus of claim 6 which further includes dedicated channels extending between said signal decoder and said buffer mechanism for transmitting data signals therebetween.

9. A method of simultaneously decompressing a compressed video image, comprising:

partitioning the video image into discrete slices;

designating a portion of each slice to be a shared portion and designating the remainder of each slice to be an exclusive portion;

defining a buffer having multiple memory locations therein;

storing the image in the buffer, which includes storing the exclusive portion of each slice in a single memory location and storing the shared portion of the image in at least two memory locations;

decoding, asynchronously, each slice with a discrete video decoder, wherein a video decoder reads only the exclusive portion of its assigned slice, and reads both the shared portion of its assigned slice and the shared portion of an adjacent slice to form a decoded slice;

synchronizing the decoded slices; and

writing the decoded image to a video output mechanism.

FIG. 1

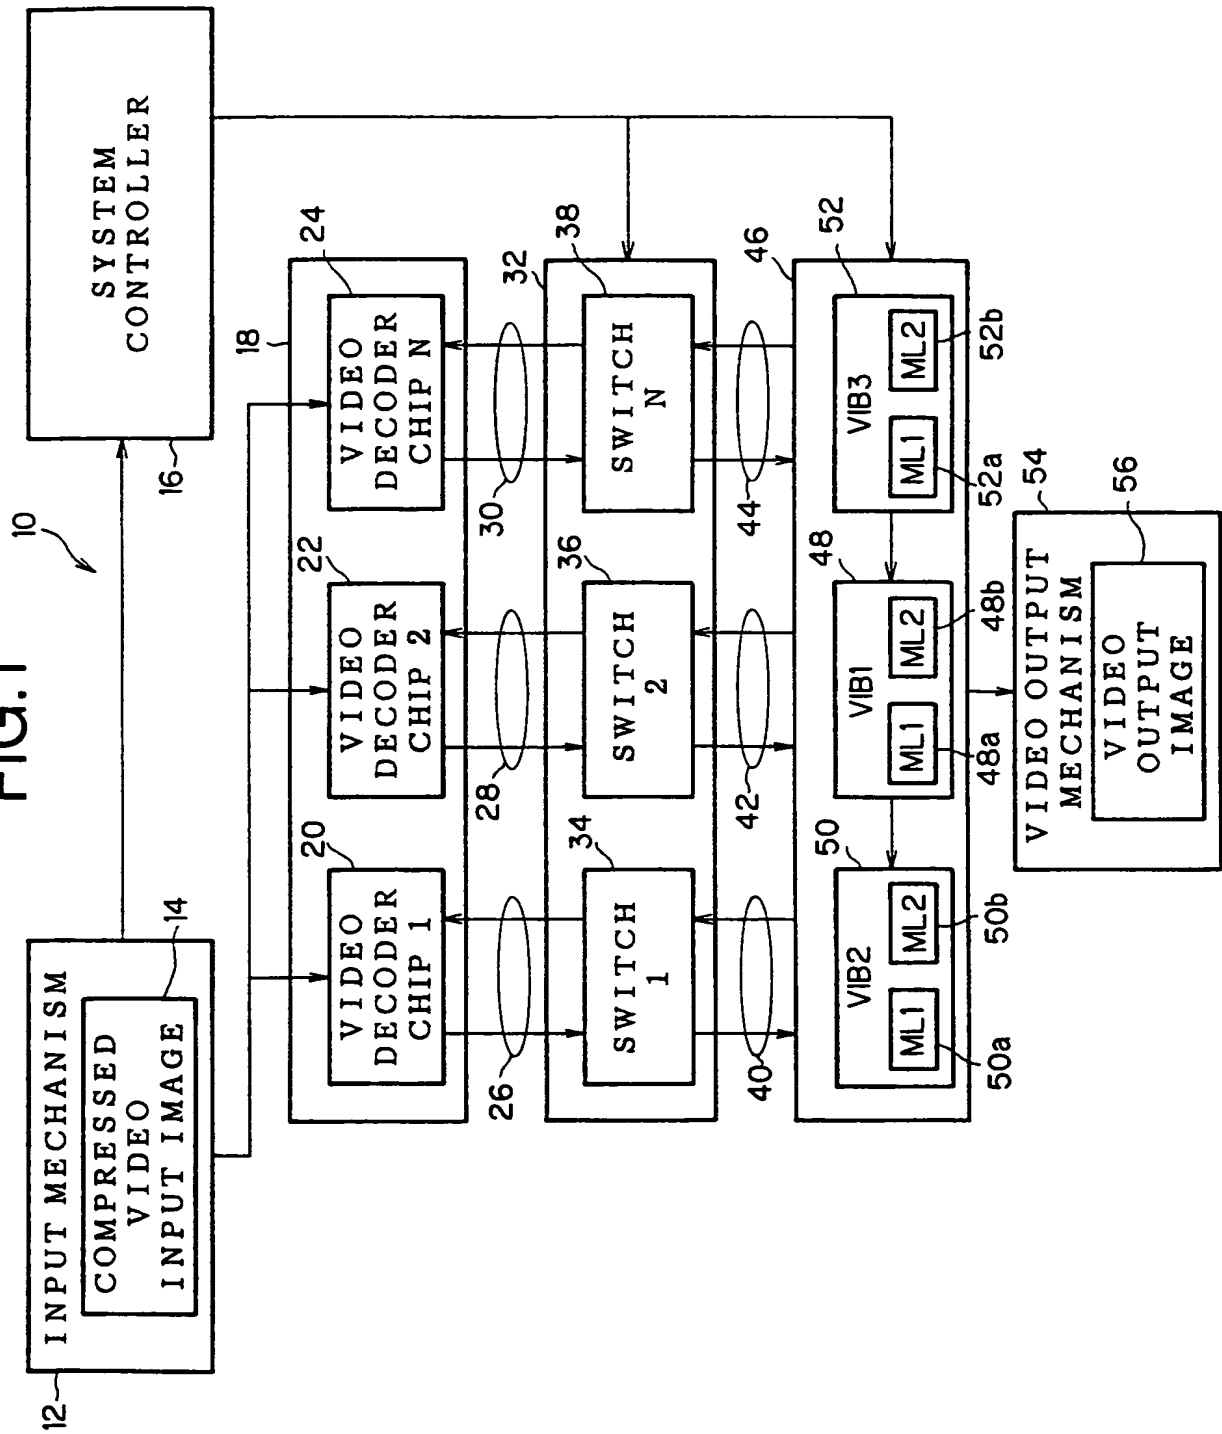


FIG.2

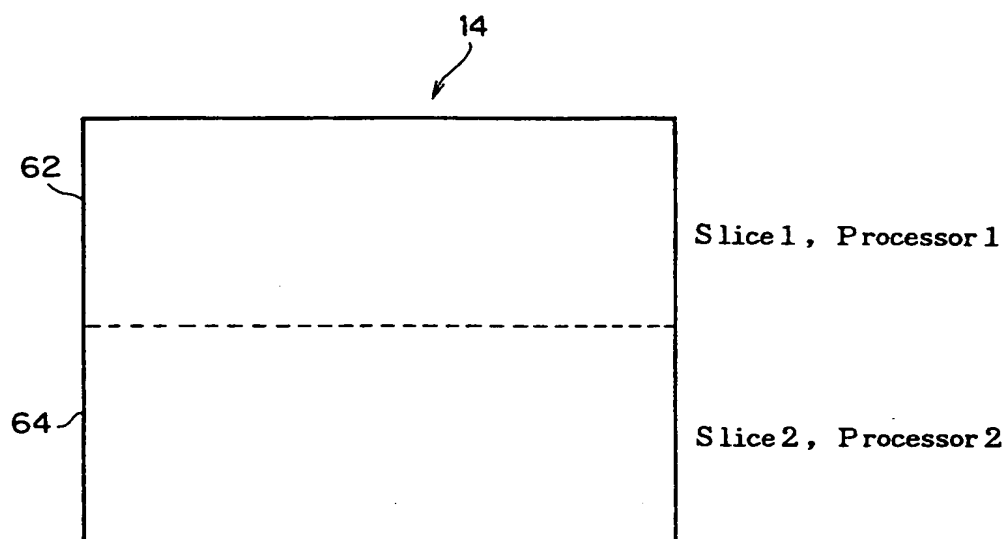


FIG.3

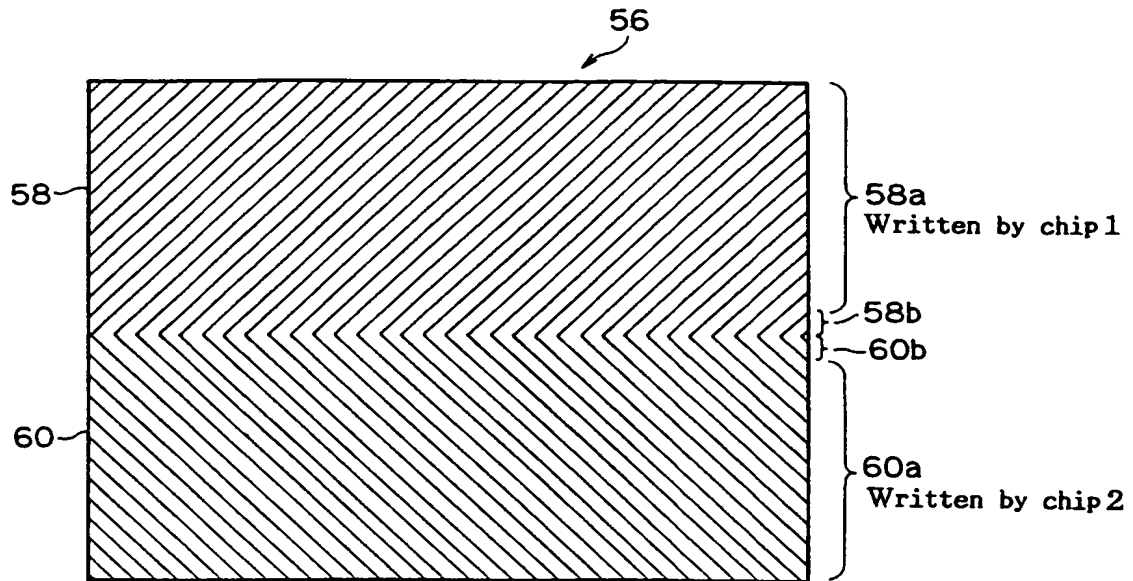


FIG.4

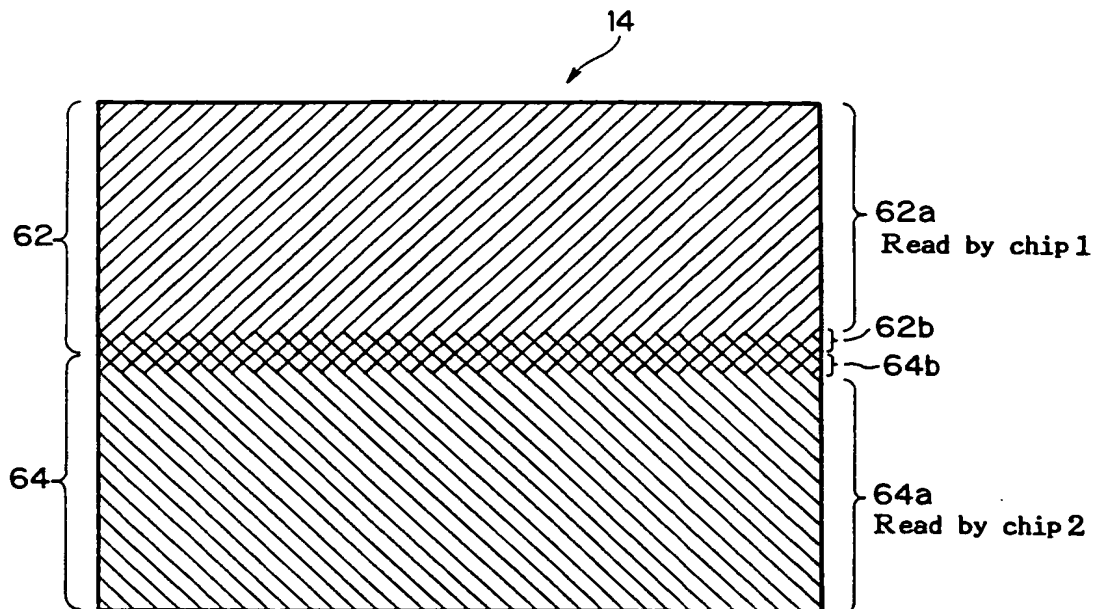


FIG.5


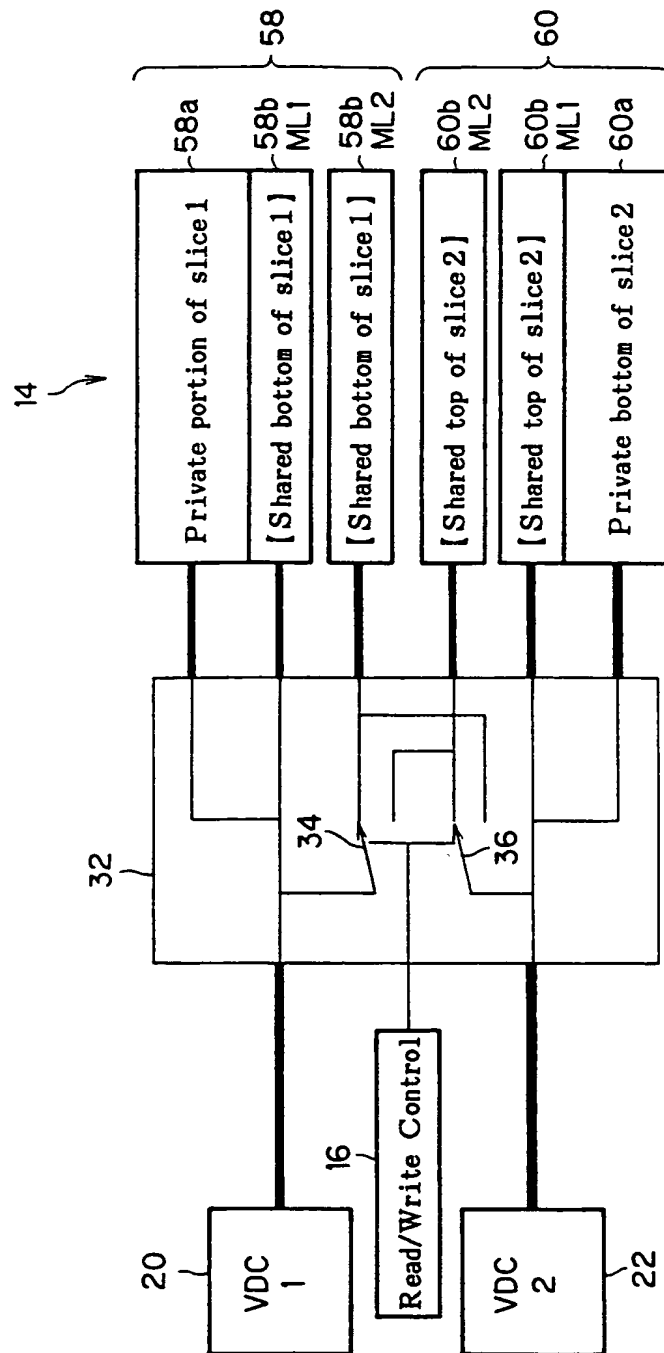


FIG.6

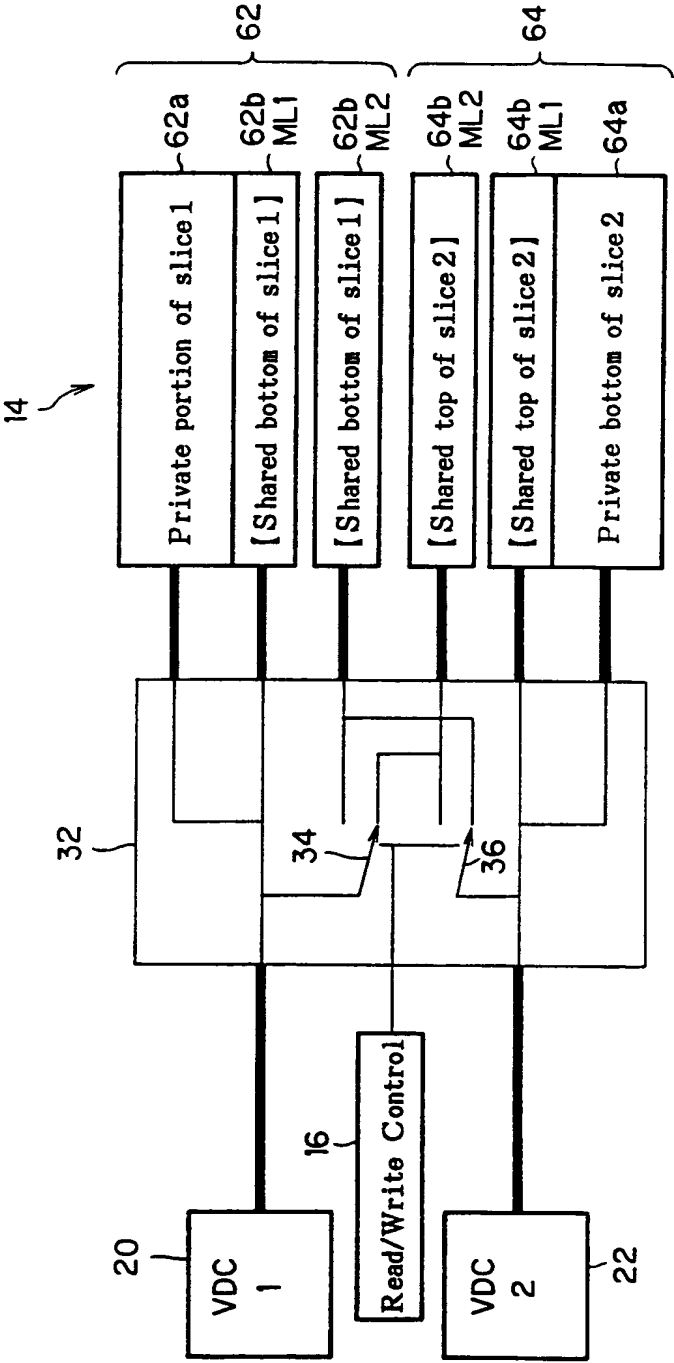

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/JP 98/01432

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04N7/50

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YOSHINORI TAKEUCHI ET AL: "RHINE: RECONFIGURABLE MULTIPROCESSOR SYSTEM FOR VIDEO CODEC" IEICE TRANSACTIONS ON FUNDAMENTALS OF ELECTRONICS, COMMUNICATIONS AND COMPUTER SCIENCES, vol. 76A, no. 6, 1 June 1993, pages 947-955, XP000390392 see abstract see page 948, right-hand column, line 2 - page 950, left-hand column, line 12 see figures 3-5  --- -/--	1-9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 July 1998

Date of mailing of the international search report

07/08/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hampson, F

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 98/01432

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 651 579 A (SGS THOMSON MICROELECTRONICS) 3 May 1995 see abstract see page 5, line 52 - page 6, line 46 see page 16, line 1 - page 17, line 4 see figures 3,7-9 ---	1-9
A	EP 0 503 956 A (C CUBE MICROSYSTEMS) 16 September 1992 see page 11, line 52 - page 13, line 29 see figures 9A-9F ---	1-9
A	CHALLAPALI K ET AL: "GRAND ALLIANCE MPEG-2-BASED VIDEO DECODER WITH PARALLEL PROCESSING ARCHITECTURE" INTERNATIONAL JOURNAL OF IMAGING SYSTEMS AND TECHNOLOGY, vol. 5, no. 4, 1 January 1994, pages 263-267, XP000565047 see page 265, right-hand column, line 16 - page 267, left-hand column, line 48 -----	1-9



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 98/01432

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0651579 A	03-05-1995	FR 2711877 A JP 7184214 A	05-05-1995 21-07-1995
EP 0503956 A	16-09-1992	CA 2062200 A DE 503956 T JP 7131785 A US 5379356 A US 5608888 A US 5649029 A US 5768292 A	16-09-1992 28-07-1994 19-05-1995 03-01-1995 04-03-1997 15-07-1997 16-06-1998

**This Page Blank (uspto)**